

daVinci



User's and Programmer's manual for the DaVinci range of touch panels



Address

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153



Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au

User's and Programmer's manual for the DaVinci range of touch panels

by Adam Pierce
 Command Systems Pty. Ltd. Australia
 11-Feb-2004
 updated 02-Jun-2004

1	Features of the DaVinci touch panel	4
2	Connecting your DaVinci panel	5
2.1	IRBus port.....	7
2.1.1	Power Supply and wiring considerations	7
3	Standalone control	8
3.1	Infra-red	8
3.2	RS232/422/485.....	9
3.3	USB	10
4	Video and Audio	11
5	Using the Touch Panel	12
5.1	The Maintenance Menu.....	12
5.1.1	About	12
5.1.2	Calibrate Touchscreen	12
5.1.3	Edit Configuration	12
5.1.4	Network and Password settings	13
5.1.5	Screen Saver	14
5.2	Video Settings	14
6	Using the Editor.....	15
6.1	Setup.....	15
6.2	Objects.....	15
6.3	Selecting objects in the editor.....	16
6.4	Moving and Sizing Objects.....	16
6.4.1	Alignment Controls	16
6.4.2	Snap and Grid	17
6.5	Context Menu	17
6.6	Creating objects	17
6.7	Containing Objects	17
6.8	Windows	17

		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.		Created April 1, 2003. XN908700-0965XC WERT123490		

6.8.1	Using Feedback	18
6.9	Zoom	18
6.10	Hierarchy Panel	18
6.11	Object Properties	18
6.11.1	Appearance tab	19
6.11.2	Actions tab.....	21
6.11.3	Properties tab.....	22
6.11.4	Static Object Properties	22
6.11.5	Button Object Properties.....	22
6.11.6	Slider Object Properties	23
6.11.7	Indicator Object Properties	24
6.11.8	Clock Object Properties.....	24
6.11.9	Video Object Properties	24
6.11.10	Screen Properties.....	25
6.11.11	Window Properties	25
6.12	Creating buttons by dropping png files	26
6.13	Removing unused resources.....	26
6.14	Downloading	26
7	Appendix A – Border styles.....	27
A 1.	Plain Border	27
A 2.	Window Border	27
A 3.	Bevel	27
A 4.	Single Image.....	27
A 5.	Multi Image.....	28
A 6.	Button	28
	Appendix B – Troubleshooting.....	29
B 1.	Panel will not start up and is displaying an error in a large red box.	29

1 Features of the DaVinci touch panel

- 15" panel with 1024 x 768 pixels and 16 million colours or 10" panel with 800 x 600 pixels and 16 million colours.
- High resolution touch sensitive screen.
- Ability to control many devices including:
 - CommBox range of processors
 - Most IR controllable equipment using an IR emitter
 - Most RS-232 controllable equipment
 - Direct Dynalite DyNet control
- Video overlay either full screen or in a window.
- Screen saver.
- Auxiliary VGA input.
- Can update the screen in response to feedback from other devices.
- 16 bit stereo digital sound
- Linux-based for stable, reliable operation

**Address**

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153

Email

sales@commandsys.com.au


support@commandsys.com.au

www.commandsys.com.au

2 Connecting your DaVinci panel

DaVinci touchscreens are available in various sizes and in desk and wall mount models. All models share a common "engine" which may have one of two different rear panels layouts:

Type A – used in most models

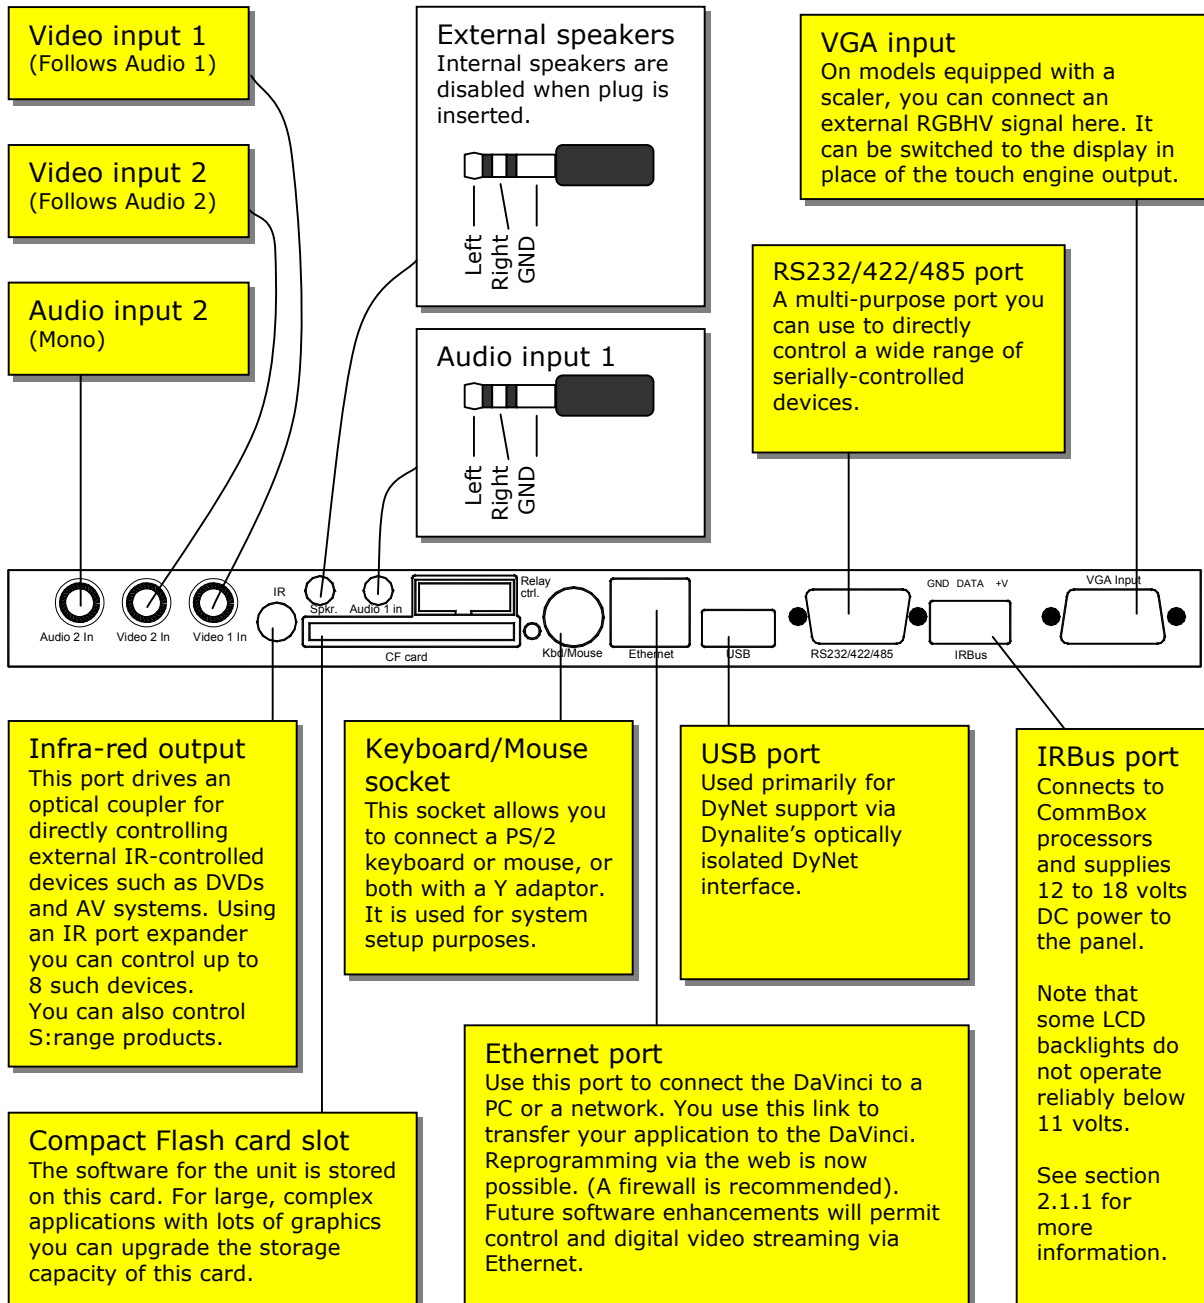


Address
 Command Systems Pty Ltd
 PO Box W105, Warringah Mall
 NSW 2100 Australia

Telephone
 +61/2/9938 4811
Fax
 +61/2/9905 6153

Email
 sales@commandsys.com.au
 support@commandsys.com.au
www.commandsys.com.au

Type B – 10.4" desk model

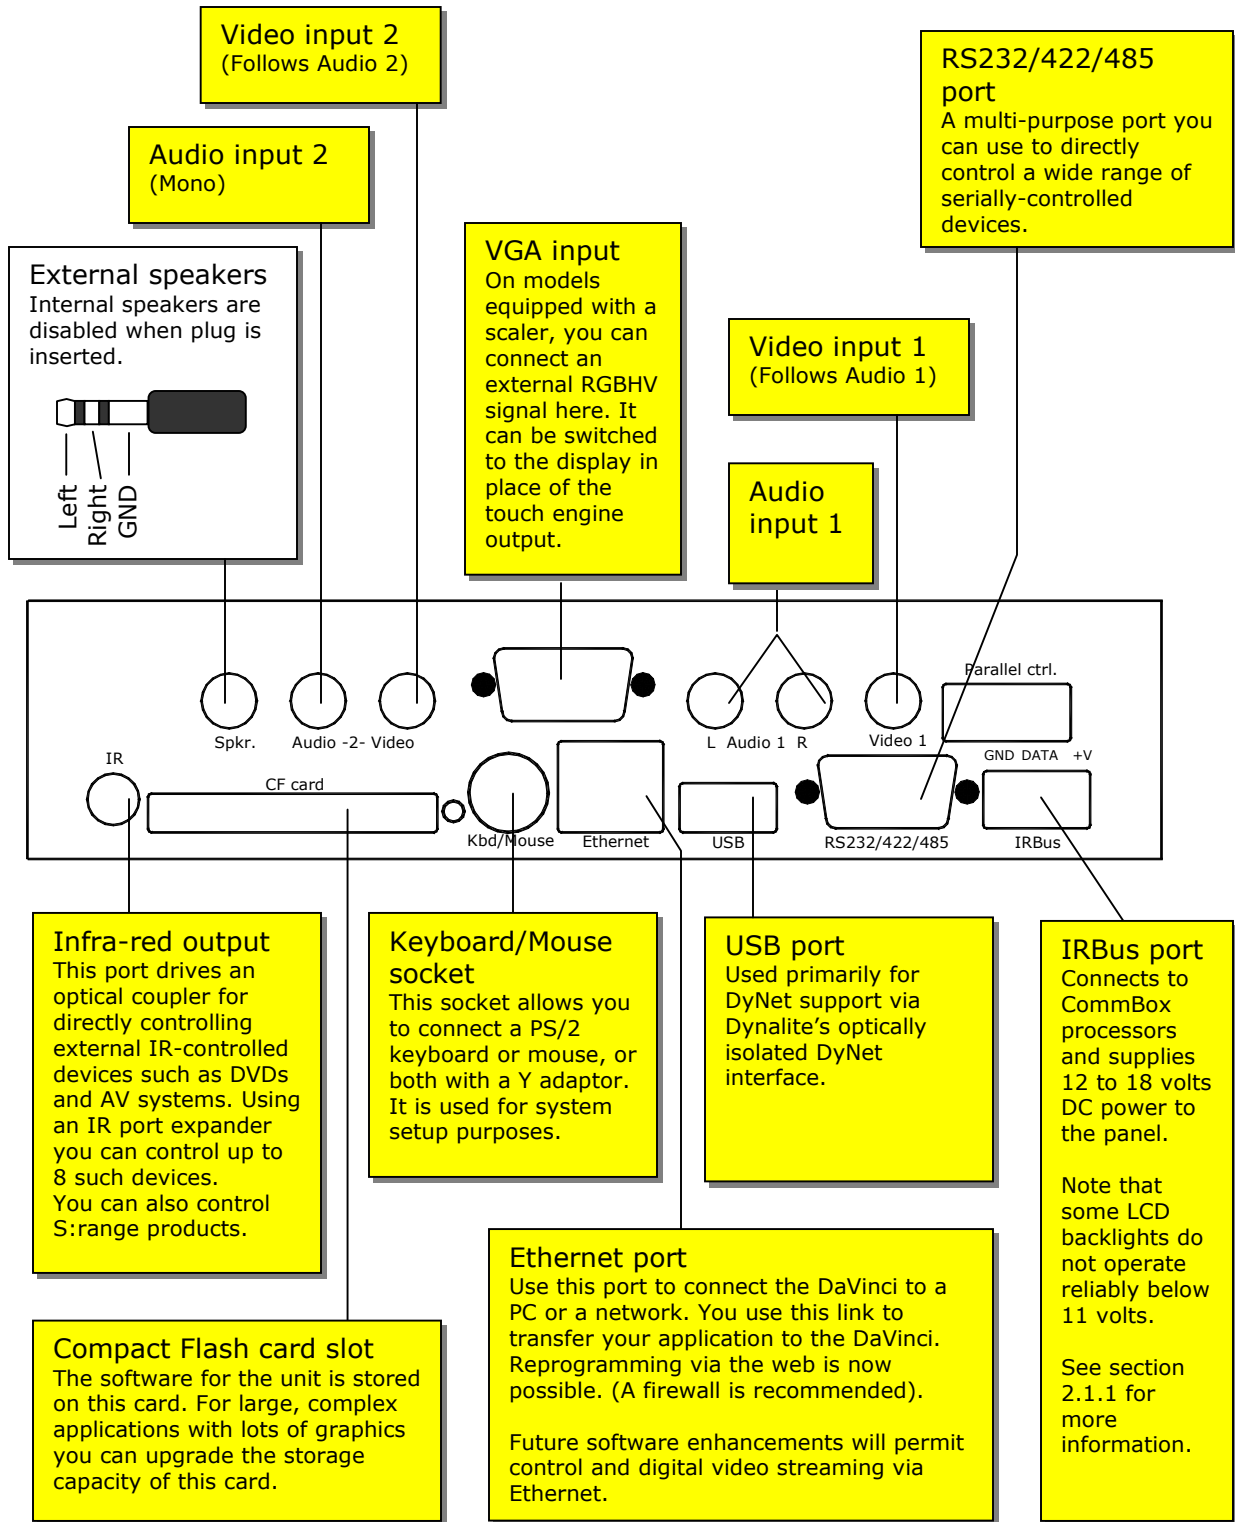

Address

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811
Fax
+61/2/9905 6153

Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au

2.1 IRBus port

As well as powering the panel, you can use this port to connect to any CommBox processor in the same way as any other control panel.

In this mode of operation, the DaVinci sends CommBox commands and receives feedback from the processor as described in section 3.11.


2.1.1 Power Supply and wiring considerations

Primarily because of the LCD backlight, the panel draws from 1.5 to 3 amps from the 12 volt supply, depending on the model. This level of current means that special care must be taken with the power supply wiring so as to ensure reliable operation.


- You need a separate power supply that's capable of sourcing a minimum of 11 volts DC, measured at the panel's IRBus socket, at up to 3 amps. So as to avoid induced noise on the video and audio inputs to the panel and ensure reliable status packet reception, this supply should be grounded only at the IRBus connection.
- The connecting cable and connectors must contribute a minimum voltage drop. For longer runs, use thicker cable.
- If it is not feasible because of cable run lengths to achieve a maximum of one volt drop on the cable, a higher voltage (up to 16 volts) power supply can be used.
- The power supply ground return should be via a separate wire, as far as is possible.



The following diagrams show the recommended wiring methods.

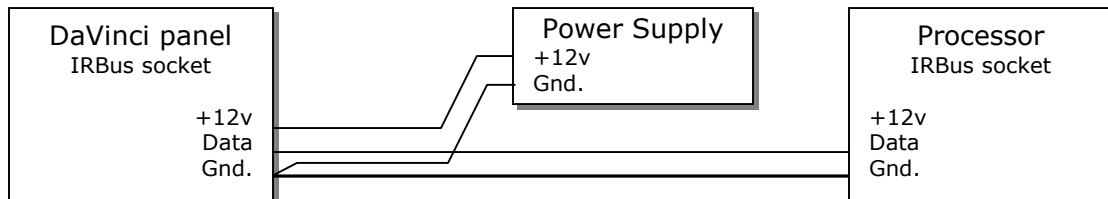Preferred method

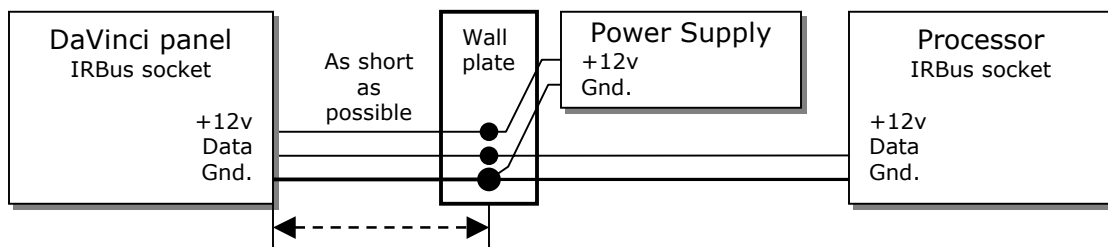

Acceptable method



		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.			Created April 1, 2003. XN908700-0965XC WERT123490	

3 Standalone control

With DaVinci you have the option of directly interfacing to and controlling a wide range of equipment without a processor. Various methods are possible:

3.1 Infra-red

A single IR port allows you to control from one to eight different devices. You can load TCS files from the extensive codeset library to control just about anything..

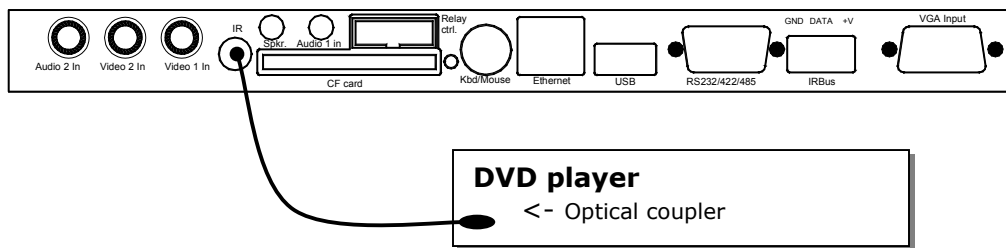


Figure 3.1.1 – Directly controlling a single IR device

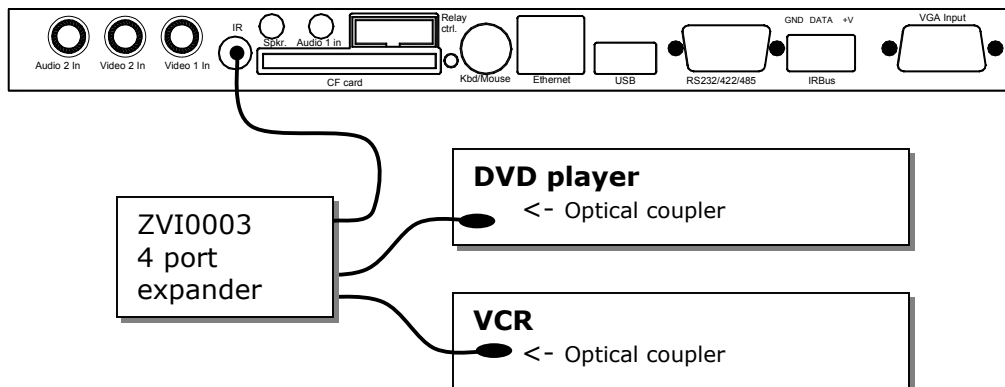


Figure 3.1.2 – Directly controlling two or more IR devices

Note that each device to be controlled must be different, as IR data is sent to all devices simultaneously. Thus, the same situation exists as if you were controlling the devices from their original remotes in the same room.

You can also use the Data line on the IRBus port to control IR devices, because the same signal, less the 38KHz carrier, is transmitted on this line. The IRBus can also be connected to an IR Repeater or MacroBox to control IR devices if it's more convenient to do so.

		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.			Created April 1, 2003. XN908700-0965XC WERT123490	

3.2 RS232/422/485

This multi-purpose port can be connected to a wide range of equipment, from high-end AV receivers to plasma displays and projectors. You can configure the port as RS-232, RS-422 or RS-485 by connecting it in a different way. The only limitation is that if you can't use the port for bi-directional comms if you are using CommBox status packets on the IRBus port. The USB port is a better choice in this case.

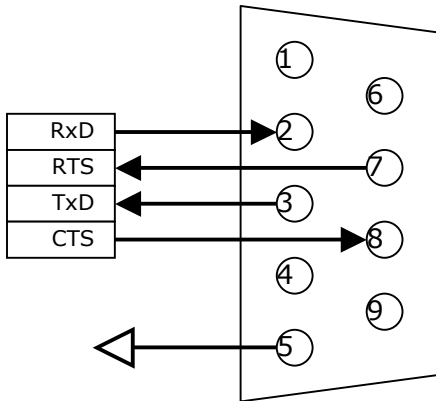


Figure 3.2.1 RS-232 connections

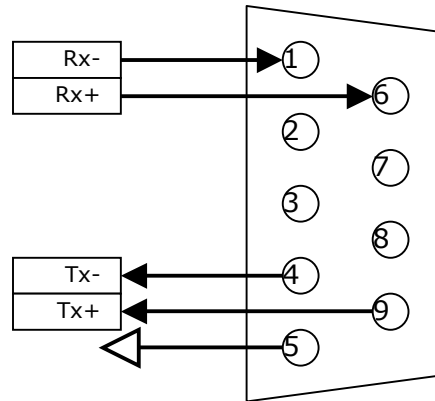


Figure 3.2.2 RS-422 connections

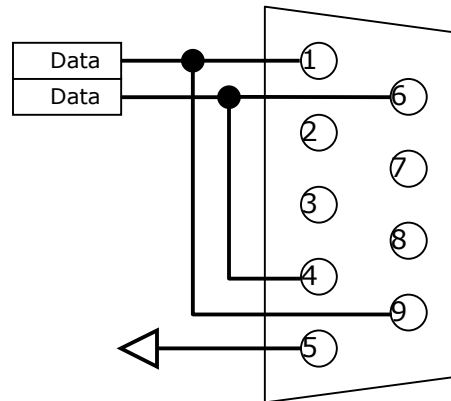


Figure 3.2.3 RS-485 connections

3.3 USB

The USB port will increasingly be used to support advanced loadable drivers such as the DyNet driver for Dyalite products.

The physical interface for each type of system simply plugs into the USB port.

Shown here is an example of how to connect a DaVinci to a Dyalite system. One of the advantages of the DTK622-USB is that it has optical isolation, so that any common-mode noise that may be present on the DyNet wiring is not coupled into any video or audio circuits that may be connected to the DaVinci panel.

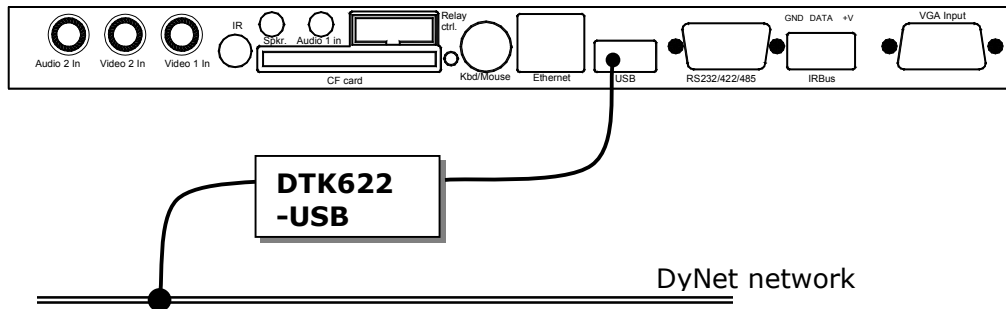


Figure 3.3.1 – Interfacing to a Dyalite DyNet network.

4 Video and Audio

All DaVinci touch panels include a flexible set of video and audio facilities, as shown in the following block diagram.

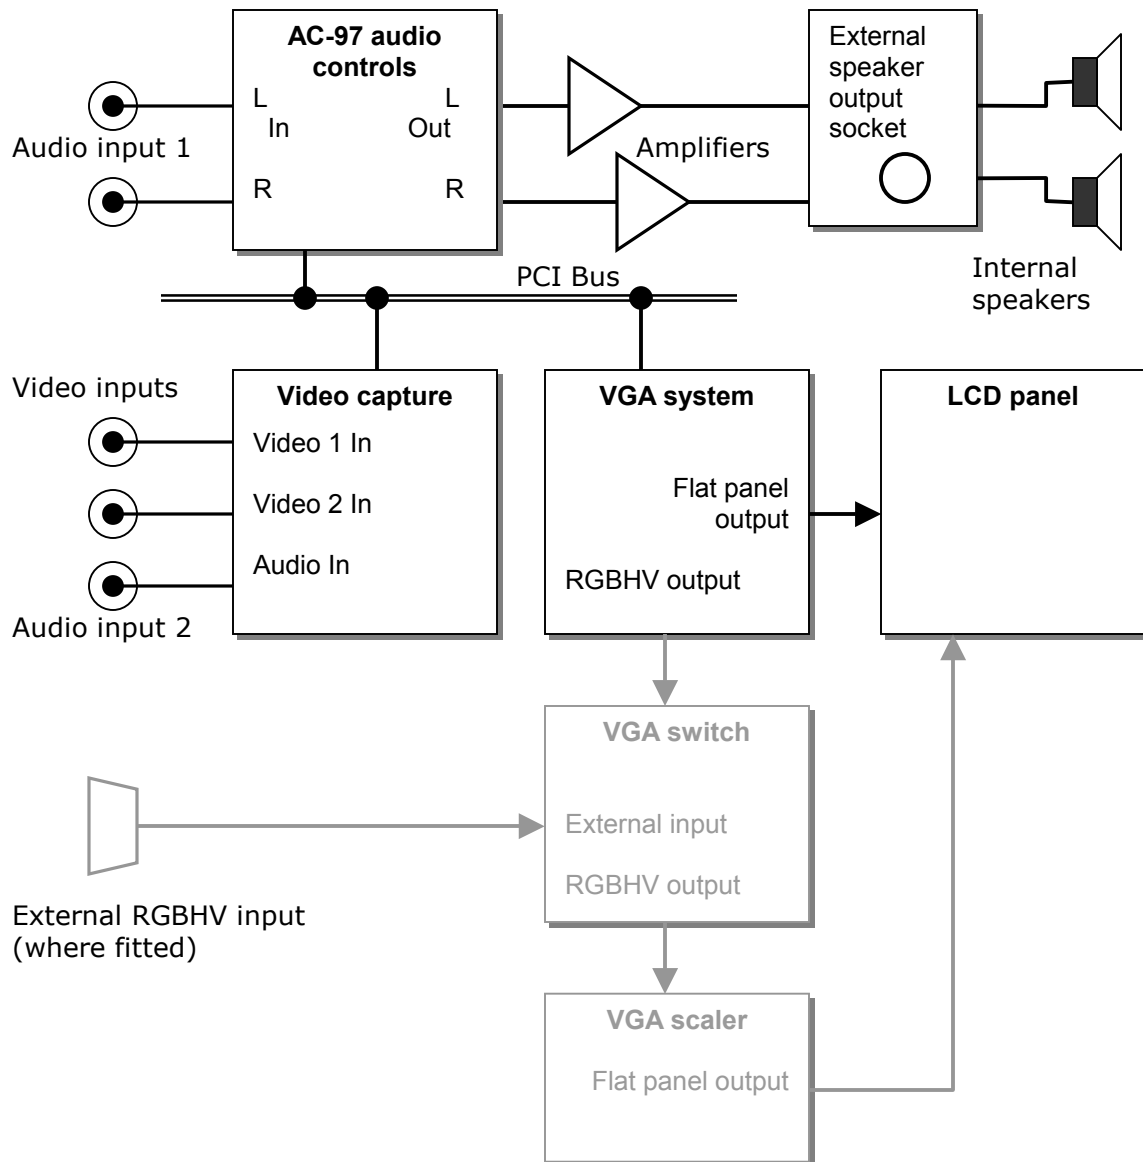


Figure 4.1 *DaVinci audio system block diagram*

- There are two sets of video and audio inputs. The audio associated with Video input 2 is mono.
- The internal amplifiers are capable of about 2 watts RMS per channel and are intended to drive the internal speakers or external small near-field monitor speakers.
- Some models may not have the external RGBHV input. In this case the parts shown in grey are omitted.

		<p>Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia</p>	<p>Telephone +61/2/9938 4811 Fax +61/2/9905 6153</p>	<p>Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au</p>
<p>Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.</p>			<p>Created April 1, 2003. XN908700-0965XC WERT123490</p>	

5 Using the Touch Panel

The touch panel presents a range of controls that you can set up using the Finetouch editor. You operate it by touching the screen on the various buttons and slide controls, which then control your installation.

The panel is also capable of showing video and external VGA.

5.1 The Maintenance Menu

To access the Maintenance Menu, you will need to plug a keyboard into the PS/2 connector. Pressing **Esc** on the keyboard will show the menu.

From the Maintenance menu, there are several tasks you can perform. The next sections explain each of these tasks.

To prevent unauthorised persons from using the Maintenance menu, simply unplug the keyboard.

5.1.1 About

This box will pop up and show some information about the current state of the panel. At present, the only information it shows is the version of the software and the name of the currently loaded configuration.

5.1.2 Calibrate Touchscreen

This function runs a calibration utility so you can tune the accuracy of the touch sensor. If you are noticing that items do not activate at the same position as you are touching, you should run this.

Because it is possible that the calibration is so wrong that you cannot select the calibration button with the touch panel, it is also possible to select the calibration utility by pressing **F2** on the keyboard.

5.1.3 Edit Configuration

It is possible to modify the configuration using the touch screen itself. This is useful if you have a small change to do or you do not have a PC easily available.

The on screen editor has almost all of the functions of the PC based editor. See the section on the editor for more details.

**Address**

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153

Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au

There is one detail you will need to know when using the on screen editor. Most of the functions are accessible via the **context menu**. This menu can be reached by holding down the **Ctrl** key on the keyboard and then touching the screen.

To exit the editor, either choose "Quit Editor" from the context menu or press **Esc** on the keyboard.

5.1.4 Network and Password settings

When you need to update the touch screen configuration from your PC, these network settings are used to determine how to connect.

The password is used when a download occurs. If the person attempting to download new data to the screen does not supply the correct password, the download will be refused.

There are two common ways to connect the touch panel via Ethernet.

Method 1: Connect to local network

Plug the touch panel into your **network hub**. You will need to ask your system administrator to select an available IP number for it. Enter that IP into the box provided. The netmask and gateway numbers can also be obtained from your network administrator. Typical values could be something like this:

IP: 192.168.0.66
Netmask: 255.255.255.0
Gateway: 192.168.0.1

Method 2: Use a crossover cable to connect directly to a PC



Plug the touch panel directly into your PC's Ethernet port using a **crossover cable** (these are usually coloured **red**).

Check the TCP/IP settings on your PC. If your PC uses a fixed IP number, set the touch panel's netmask and gateway to the same value as your PC and set the touch panel's IP to the same as your PC plus one. For example:

Your PC
IP: 192.168.0.7
Netmask: 255.255.255.0
Gateway: 192.168.1.1

Set touch panel to:
IP: 192.168.0.8
Netmask: 255.255.255.0
Gateway: 192.168.1.1

If your PC is set to obtain TCP/IP setting automatically (DHCP), you will need to set it to some fixed number. Using the numbers in the preceding example is a good idea.

		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.			Created April 1, 2003. XN908700-0965XC WERT123490	

5.1.5 Screen Saver

To save power, extend lamp life and reduce heat emissions, the panel can turn off its screen after a certain period of no activity. You can use the Screen Saver function to set how long this period is or to disable screen saver functionality if you would prefer the screen to stay on at all times.

Once the screen saver has engaged and the screen has turned off, you may turn it back on at any time by touching the screen.

Some models of touch screen may take two or three seconds to wake up so don't panic if the picture does not appear immediately.

5.2 Video Settings

If you are using the video display facilities, it is possible to tune the video settings by touching the video window. A video setting box will appear in which you can modify brightness, contrast etc.

If your video capture has undesirable fuzzy stuff around the edges, you can use the **crop picture** settings to remove it.

Note this feature only works on video windows, not full screen video.

**Address**

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153

Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au

6 Using the Editor


6.1 Setup

Before you start using the editor, it is a good idea to set up a few basic items. These can be found in the Setup window on the Finetouch menu.

First type your name in the appropriate box. This name will be saved with your configuration and will also be downloaded to the panel.

Auto save is useful in case you have a problem with the software or your computer. It will simply save your configuration every few minutes. Saving often is recommended.


You will need to enter the IP address of your panel before you can download to it. See the previous section for details on how to set up Ethernet communications and how to obtain an IP number.

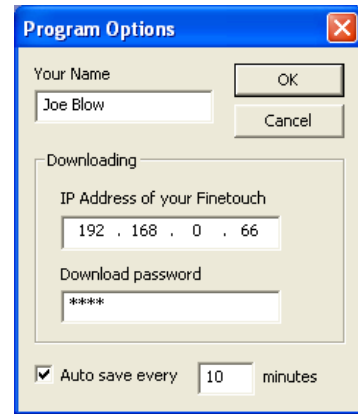

6.2 Objects

The whole finetouch system is based on the concept of objects. An object can be one of the following types:

STATIC	This is for displaying text or images. It does nothing when touched.
BUTTON	This can trigger an event when touched.
SLIDER	This object operates items, which have a range of values such as an amplifier's volume or a light dimmer.
INDICATOR	Does nothing when touched. It exists to provide visual feedback of the value of something.
CLOCK	Shows the current time.
VIDEO	Routes a video image from the external video input to the touch screen.
WINDOW	A pop-up panel, which can appear and disappear.

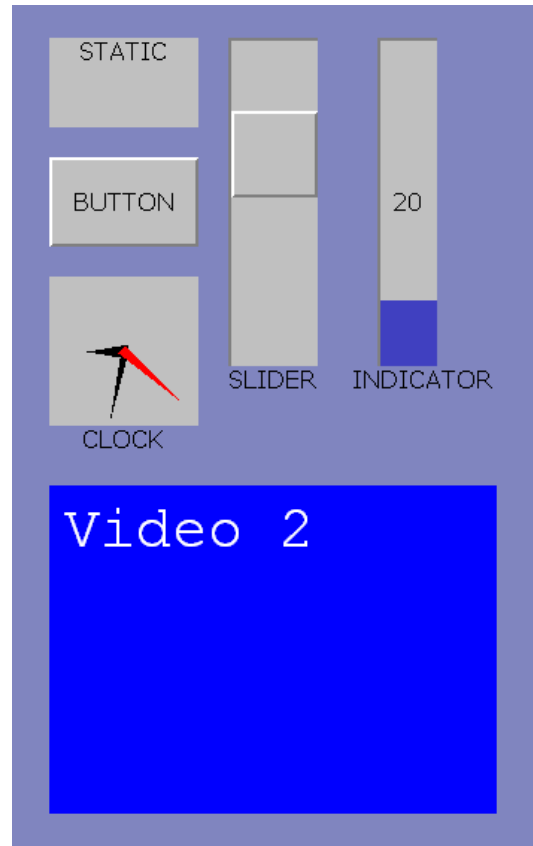

Address
Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone
+61/2/9938 4811
Fax
+61/2/9905 6153

Email
sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au

6.3 Selecting objects in the editor

Clicking on an object will generally select it. If you want to select more than one object, hold down **Ctrl** on your keyboard and you can click multiple objects.

Each selected object will have animated 'marching ants' around it.

TIP: *Buttons that have been configured to swap to a different screen are difficult to select because when you click on them, the screen swap occurs and the button disappears. If you need to select an object in this case, hold down the **Ctrl** key and the button's action will not occur.*

6.4 Moving and Sizing Objects

When you move your cursor over an object, the cursor will change to indicate what kind of action would occur at that point.

A four-pointed arrow means that you can drag the object to move it.

A two-pointed arrow means you can drag the mouse to resize the object.

If multiple objects are selected, they will all move or resize together.

You can also move objects using the cursor keys on your keyboard. This is a good way to precisely line up an object. Pressing the cursor keys will move the selected objects one pixel at a time. If you hold down SHIFT while using the cursor keys, the selected objects will move to the nearest snap point.



6.4.1 Alignment Controls

You must have at least two objects selected to use the alignment functions. The last object you select will become the **master object**. This is marked with yellow-and-black animated dashes as opposed to the black-and-white dashes of the other objects. Alignment controls will use the master object as a reference. For example, if you select "align left", all the selected objects will line up to the left edge of the master object.

The alignment controls are accessible via either the alignment submenu in the context menu or by using the alignment toolbar. The alignment functions are:

Align Left	The left edges of all selected objects are lined up
Align Right	The right edges of all selected objects are lined up
Align Top	The top edges of all selected objects are lined up
Align Bottom	The bottom edges of all selected objects are lined up
Make all objects the same size	All objects will become the same size as the master object

If you cannot see the alignment toolbar, you can activate it using the **View** menu.

		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.			Created April 1, 2003. XN908700-0965XC WERT123490	

6.4.2 Snap and Grid

Snap and grid controls are located in the toolbox. If you cannot see the toolbox, you can activate it using the **View** menu.

If you activate snap and type a number into the snap box, all movement and sizing of objects will be restricted to a grid of that size in pixels.

This grid is normally invisible but you can see it by activating the Grid checkbox.

6.5 Context Menu

This can be seen by right-clicking (or if you are editing on the touch panel, by holding Ctrl and touching). It brings up a bunch of functions that are relevant for your current state of editing.

6.6 Creating objects

You can create objects using the context menu or by the main menu under Finetouch Create. The object will be created with a default appearance appropriate for the type of object. You can also use the CREATE sub menu in the context menu.

An object will be created with a default set of properties (colour, size etc) that you can modify by double-clicking the object.

6.7 Containing Objects

If you right-click on an existing object and then select "Create Object" from the context menu, the new object will be contained within the object you clicked on. You will not be allowed to move the new object outside its container.



This is useful for making control panels. For example, create a large STATIC object and then create several buttons contained within that STATIC object. You can then move the whole collection around as though it were a single object.

6.8 Windows

Windows are a type of object that can be made visible or invisible while the panel is running. By containing other controls within a window, you can make a pop-up control panel.

To create a window, select "Window" from the "Create" sub menu. The new window will be quite small and will contain a single button marked with an X. This is the close button. You may delete this button if you do not want the user to be able to manually close the window.

Windows can be moved and resized in the editor just like any other object. If you press the **close** button, the window will disappear. You can make it reappear either by creating a button with a **show window** action or by manually showing the window using the Finetouch|Window menu.

		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.			Created April 1, 2003. XN908700-0965XC WERT123490	

6.8.1 Using Feedback

On the panel, windows can show or hide themselves in response to feedback. You can define the feedback condition in the window's properties box.

6.9 Zoom

The zoom can be controlled by the zoom control in the toolbox or by the zoom buttons on the tool bar.

Most useful of the zoom controls is the "Zoom to fit window" which will automatically calculate the most ideal zoom setting to allow you to see the entire screen you are editing.

Zoom is not available when you are editing on the touch panel itself.

6.10 Hierarchy Panel

This panel can be activated by selecting it in the **View** menu. It provides a logical overview of all the objects you have created and allows you to select objects quickly.

The hierarchy window is not available when editing on the panel.

6.11 Object Properties

Each object has certain settings or **properties** that can alter the object's appearance or behaviour.

Properties can be edited by either right-clicking on an object and selecting **Edit Properties** from the context menu or by simply double-clicking an object.

Each type of object has its own specific set of properties. A lot of them are similar to each other, there are some common properties such as colour selection and so on but each object type has its own peculiarities.

The property window will usually have **Tabs** with which you can use to switch between different property panels.

**Address**

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153

Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au


6.11.1 Appearance tab

This tab appears often. It contains a range of standard controls for laying out the appearance of an object. The subsections within this tab are:

6.11.1.1 Border

Activate this item to make a border around an object. The dropdown box will list the border styles which currently exist. If none of them are suitable, you may add more border styles using the **New** button or modify an existing border style using the **Edit** button.

Border styles have parameters which vary depending on the style. See Appendix A for more detail on border styles and parameters.

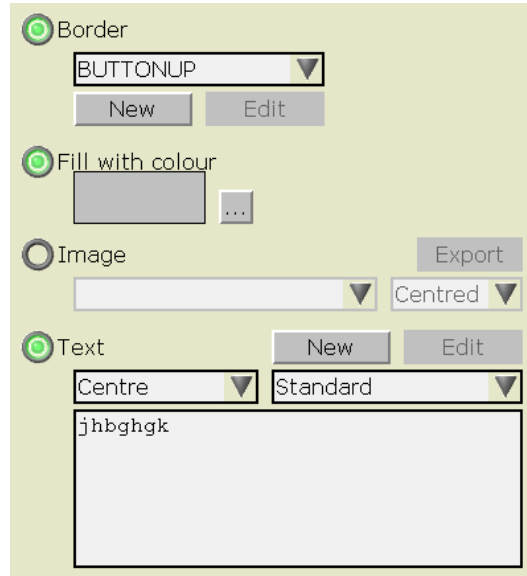


6.11.1.2 Fill with colour

This item can be activated to provide a solid colour fill behind any text or images. Pressing the button next to the colour swatch will take you to the colour picker where you may select a colour.

In the colour picker, you can either pick one of the supplied colours or you can make your own by using the "Add" button and typing in red, green and blue values into the boxes provided.

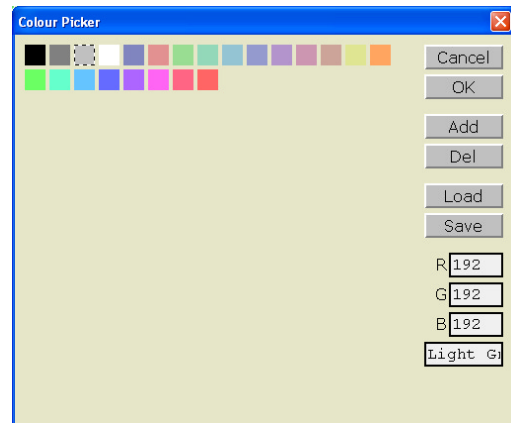

If you want to use any of your custom colours in other Finetouch configurations, you can save your modified colour scheme using the Save button.



6.11.1.3 Image

Use the drop-down list to select from any images already loaded. If the image you want is not in the list, select "Load a new image" and you will be able to retrieve an image from disk.

Note that the editor only loads images in PNG or BMP format.

		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.			Created April 1, 2003. XN908700-0965XC WERT123490	

There are three image modes you can choose from:

Centred	Places the image in the centre of your object. This does not alter the size of the image.
Stretched	Expands, shrinks or stretches the image so it exactly matches the size of your object.
Tiled	Your object is filled with as many copies of the image as will fit. The size of the image is not changed.


The **Export** button can be used to save an image back to disk in PNG format. This is useful if you need to put an image into your image editor for modification.

6.11.1.4 Text

Activate the text option and you can type some text into the box provided. There are a few other options available with the text.

The first text option is the placement. This controls where the text will appear within your object. Choices are Top Left, Top Centre, Top Right, Centre, Bottom Left, Bottom Centre and Bottom Right.

To change the font, size or colour of the text, you will need to create a **text style**. Use the "New" and "Edit" buttons to create or modify text styles.

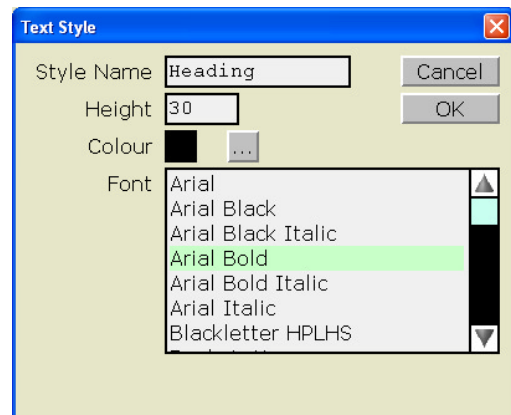

Text styles can be useful when you want to have a whole bunch of objects having the same font, size and colour of text. By changing the style, you will be able to simultaneously update the text on all the objects that use the style.



Address

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153

Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au

6.11.2 Actions tab

This tab allows you to define **Actions** and **Feedback** for your object.

Actions are things that the object does when activated, for example, a button object will perform some actions when pressed.

Feedback defines what the object will respond to. In the case of a button, it can light up when certain events take place.

Actions and feedback work on the principle of **commands** and **channels**. Actions can use either but feedback can only use channels.

Feedback

CHANNEL Peripheral bit

bit number bit 00

equal 1

Actions when pressed

- Show window(PANEL 5, show)
- Send RS232(9600, 00 00 FE 0D)

Add Delete Move up Move down

Repeat last code while key down

Feedback works by comparing the value of a channel to a given number. For example, a light might be on (1) or off (0) and you can program the object to look for a particular value.

You can also do comparisons such as 'greater than' or 'not equal'. For example, you might program a button to light up if the volume is greater than 15.

Channels often contain sub-channels, for example the AUDIO channel of a CommBox contains Bass, Treble, volume etc. as sub-channels.

At the time of writing, the available channels are:

- CommBox Audio
- CommBox Input select
- CommBox Peripheral switches
- CommBox User Variables
- DaVinci built-in audio controls

Commands can be triggered by a button press, slider movement etc. and often have parameters which might be a number or an object such as a codeset file etc. The available commands at present are:

- Play sound (WAV file through DaVinci's internal speakers)
- Swap screen
- Show Window
- Send code (using a TCS codeset file)
- Send RS232
- Set DaVinci's internal audio volume



Address

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153

Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au

6.11.3 Properties tab

This tab is available on all objects and provides a way to directly key in the size and position of the object. Some objects also use this tab to provide extra configuration items.

6.11.4 Static Object Properties

A static object only contains the appearance tab and the properties tab mentioned earlier.

6.11.5 Button Object Properties

A button has three states. These are called **UP**, **DOWN** and **ACTIVE**. The UP state is what you see most of the time. The DOWN state is what you see while the button is being pressed and the ACTIVE state is what you see if the button has been assigned a feedback rule and that feedback rule is currently true.

The button properties window contains three appearance tabs, one for each of these modes. You will not have to fill in the ACTIVE tab if your button does not have any feedback. Feedback can be assigned on the Actions tab.

**Address**

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153

Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au

6.11.6 Slider Object Properties

The slider has two appearance tabs labelled **Groove** and **Thumb**. Groove represents the 'background' of the slider and Thumb represents the bit that you drag up and down.

In the Actions tab are a couple of extra controls which relate to the slider's appearance, these are the **Orientation** which can be either horizontal or vertical and the **Range** which sets the values that the slider encompasses.

Vertical sliders always have the minimum value at the bottom and the maximum value at the top. Horizontal sliders always have the minimum value at the left and the maximum value at the right.

Actions and feedback for a slider object are a little more complex. Sliders can either:

1. Directly control a channel.
2. Send up/down commands to external equipment.
3. Respond to feedback to indicate the value of a channel.

If you select a channel and it is capable of being directly controlled, the slider will control it as well as responding to feedback from it.

If the selected channel is a feedback-only channel, then the slider will respond to the value of that channel but will not attempt to control it directly.

In addition, you can specify actions to be performed whenever the slider is moved. In the example on the right here, I am sending some Infra Red codes to control the volume on an external CommBox. When the CommBox volume changes, it sends feedback which is picked up on the Pgm Volume channel.

Groove	Thumb	Properties	Actions
vertical			
Minimum value		0	
Maximum value		40	
<input checked="" type="radio"/> Link to channel			
		CommBox Audio	
Parameter		Pgm Volume	
<input checked="" type="radio"/> Up/down actions			
Send code(CommBox, 25)			
Add Delete Move up Move down			
Send code(CommBox, 27)			
Add Delete Move up Move down			

6.11.7 Indicator Object Properties

An Indicator is similar to a slider in that it has a Groove and Thumb appearance tab. The thumb is slightly different in an indicator – it stretches from the bottom of the object up to where the current feedback level is.

The indicator does not do anything so there are no actions on the action tab. There is only feedback. You would usually assign the feedback to a variable item such as audio volume.

6.11.8 Clock Object Properties

The clock has a regular appearance tab for the background. There is another appearance tab that allows you to select the clock style and colours:

Analogue style gives you a clock with hands. You can select the colour for the hour, minute and second hands.

If you select a **digital** style, you will be able to select a text style for the numbers to appear in.

6.11.9 Video Object Properties



There are two types of video object, a **video window** and a **full screen video**. A video window can be created in the same way as any other object.

To create a full screen video, choose **create screen** from the menu. A window will pop up where you can type the name of your screen. Be sure to select **Video Panel** as the screen type.

A video window has only two properties worth mentioning, the video standard and the video input. These correspond to the input sockets on the DaVinci touch screen and the standard sets what type of signal you will be providing.

A full screen video has the same properties as a video window plus the same properties as a screen. In addition to that, there is an extra item called **Ignore swap-screen feedback**. This item, when activated, prevents any other screens from becoming active unless the user specifically activates them. This is to prevent screen-swap feedback from closing a full-screen video display. However, it will still be closed if feedback selects a different parent screen to the one from which the full-screen video was invoked.

If you do not place any buttons or other objects on your full screen video, touching the screen anywhere will automatically swap back to the previous screen. If you do place objects on the full screen video, the touch-anywhere functionality is disabled so you will have to make sure you provide some way for the user to leave the video screen.

		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.			Created April 1, 2003. XN908700-0965XC WERT123490	

6.11.10 Screen Properties


A screen has a single appearance tab that is very similar to a STATIC object. Under the Properties tab, you will also see a box where you can enter a name for the screen. This name is how you identify the screen when you are making a screen swap action.

The feedback section lets you enter a feedback item and a value. If the item matches the value, the screen will be selected.

There is also a control to set the "Default Screen". If this is turned on, then the screen will be the first one the user sees when the touch panel is started.

Activation actions will occur whenever the screen is swapped to. Typically you might like to put in a sound effect.

You will also notice that the size and position boxes are shaded grey and are not able to be modified for a screen object. A screen object by definition is the size of the screen.

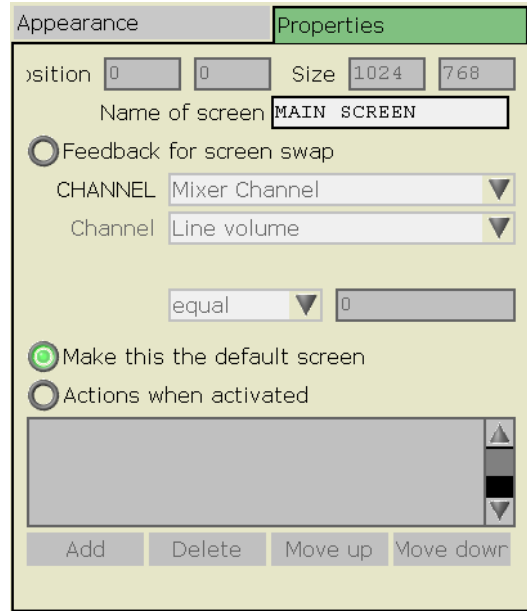


6.11.11 Window Properties

Similar to the screen properties, the window properties box has an appearance tab and a properties tab. The properties tab contains a name and feedback items the same as the screen properties box.

When the feedback condition matches, the window will appear on the panel. If the feedback condition does not match, the window will disappear. If you do not enter any feedback condition, the window can only be opened by defining a button with a "SHOW WINDOW" action.

When the window opens whether by feedback or by a button, some actions may optionally be made. In the example pictured here, the window is used to indicate an error condition and so has a sound effect associated with it.

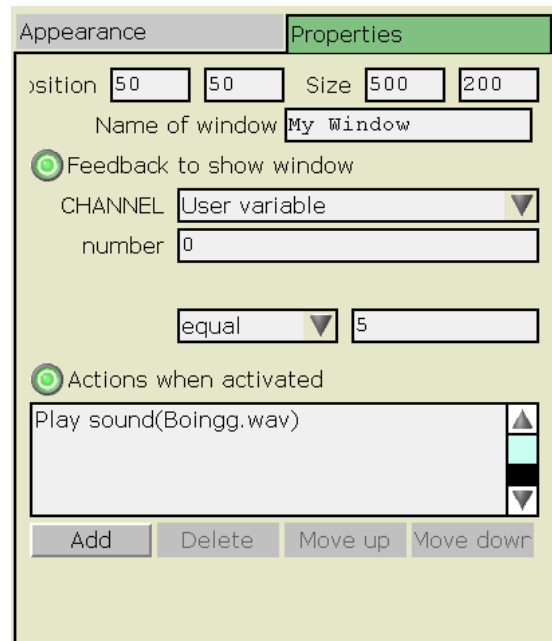

6.12 Creating buttons by dropping png files

In addition to creating objects using the menu, you can also create STATIC or BUTTON objects by dragging PNG or BMP files from Windows and dropping them onto the editor. If you do this, the editor will give you a choice from the following actions:

Create a static object from each image	Create a STATIC object which contains the dropped image. If more than one image is dropped, multiple STATIC objects will be created.
Create a button from each image	Create a BUTTON object which contains the dropped image. If more than one image is dropped, multiple BUTTON objects will be created.
Create a single button	Creates a single BUTTON object. If one image is dropped, the button will contain that image. If two images are dropped, they will become the UP and DOWN images for the button. If three images are dropped, they will become the UP, DOWN and ON states for the button.
Use the image as a background	The current screen is re-defined to use the dropped image.
Create a new screen with the image as a background	A new screen is created using the dropped image as the background.

6.13 Removing unused resources

This menu item looks for any bitmaps, sound files etc that you have loaded but which are not actually used by any object. It then deletes these items from your configuration. This allows you to trim your configuration files to save space.



6.14 Downloading

Once you are happy with your configuration, you should save it. Then you will want to download it so you can test it on a real panel.


First make sure your IP address and associated parameters are set correctly on both the panel (use the maintenance menu) and the editor (use the setup window).

Also ensure you have entered the correct password if required. The password is entered in the setup window.

Then simply choose download from the menu. Depending on how many large bitmaps and other items you have included, the download may take some time. The editor will display a progress bar so you can have some indication of how far the download has progressed.

		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.			Created April 1, 2003. XN908700-0965XC WERT123490	

7 Appendix A – Border styles

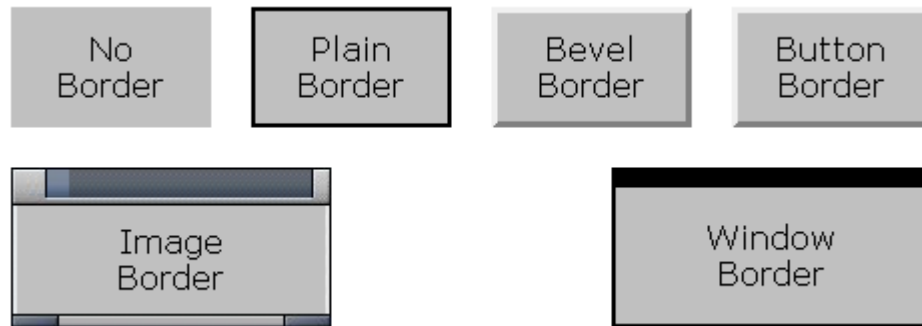

A 1. Plain Border

This places a plain solid border around your object. The two parameters are the width of the border in pixels and the colour of the border.

A 2. Window Border

This produces a border which has a coloured outline and space at the top for a title bar. At present the title bar is only used to display the name of a window. You can use a window border on other types of object but the title bar will be empty.

The parameters for this border style are the border colour, width and title bar height in pixels.

A 3. Bevel

This border produces a simple 3D effect which gives the appearance of a raised or lowered area. To create this effect you need to specify two colours, a light colour and a dark colour.

A 4. Single Image

This type of border will load a PNG image from disk and draw it underneath the content. The margin parameter indicates how wide the border is and the contents will be shrunk by this amount to leave the outside of the image showing.

		Address Command Systems Pty Ltd PO Box W105, Warringah Mall NSW 2100 Australia	Telephone +61/2/9938 4811 Fax +61/2/9905 6153	Email sales@commandsys.com.au support@commandsys.com.au www.commandsys.com.au
Command Systems reserves the right to change product specifications at any time for the purpose of product improvement.			Created April 1, 2003. XN908700-0965XC WERT123490	

A 5. Multi Image

A multi-image border allows you to select several small bitmaps for the edges and corners of the border. It is similar to the Window border style in that there is a title bar.

There is no width parameter as the border size is computed from the size of the images. Images for the edges are tiled to fill the space required.

A 6. Button

This is similar to the Bevel border style except it offsets the contents down a bit if you specify a negative width value. This makes the appearance of a button that 'pushes in' to the screen. This style is used by default when you create a button object.

**Address**

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153

Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au

Appendix B – Troubleshooting

Note this section will be added to as new wisdom comes to light.

B 1. Panel will not start up and is displaying an error in a large red box.

Errors such as '**cannot load**' or '**item not found**' are usually caused by a failed download. Leave the error on the screen and try your download again.

'**Serial communication error**' is an internal error. If pressing RETRY a couple of times does not solve the problem, try re-starting the panel. If this and a fresh download fails you might have a faulty touch panel. Contact your dealer to arrange repairs.

**Address**

Command Systems Pty Ltd
PO Box W105, Warringah Mall
NSW 2100 Australia

Telephone

+61/2/9938 4811

Fax

+61/2/9905 6153

Email

sales@commandsys.com.au
support@commandsys.com.au
www.commandsys.com.au